

BE-GATE

PLEXIGLASS GATE
BI-DIRECTIONAL MOTORISED



Application areas

- ◆ OFFICES
- ◆ RECEPTION AREAS
- ◆ GYMS
- ◆ MUSEUMS
- ◆ SPORTS FACILITIES
- ◆ POOLS

DESCRIPTION

Be-gate is the entrance gate, it welcomes and guides users and manages their flow, designed and developed in Italy.

The accessories are point of force that allows this Be-gate to be useful in all situations and can be easily used. In entrance areas to successfully control people's access. Equipped with latest generation electronic devices, it is equipped with software by means of which it is possible to vary the programs and parameters of use with the aid of a joystick in the various menus of our firmware. The electronic board monitors and controls the opening speed and impact power to avoid Hard impacts with children and sensitive people. The Be-gate can be connected to fire systems so that the door opens automatically in the intended direction of escape.


MATERIALS

Column and arm (std)	chromed or painted steel
Cap and Base cover	chromed or painted steel
Mechanism	galvanized steel
Signage table	plastic with acrylic print


FEATURES

Drive	Bi-directional gate
Power supply unit	Single-phase 110/220 V AC @ 50/60 Hz
Control logic	26 V DC
Absorption	60 W
Electromagnetic brake	Present and controlled by the CPU
Clutch	Present
Rotation speed (90°)	2 s +/- 10% (tolerance)
Operating temperature	-10 - +50 °C @ 20 - 90% RH (no cond.)
Weight	29 kg
IP degree	IP 21
Standard	In according to CE Certification


COLORS & CUSTOMIZATIONS

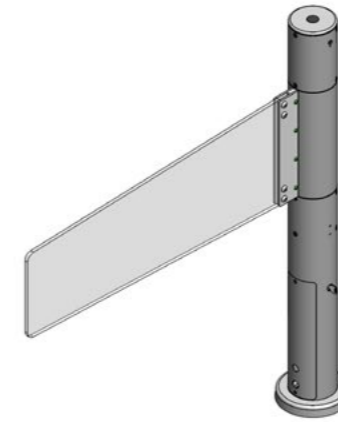

SIZES - LATERAL VIEW



SIZES - FRONT VIEW

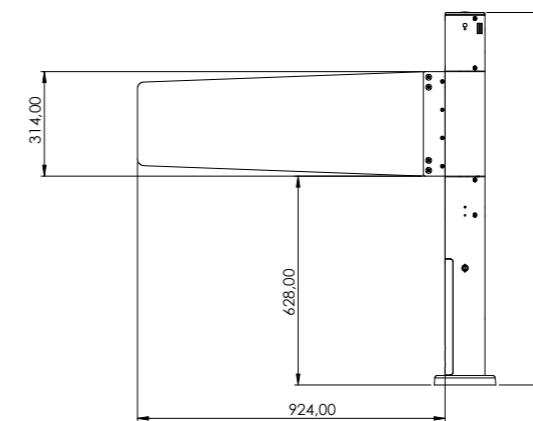

SIZES - TOP VIEW



ACCESSORIES

- Radar opening
- Photocell opening
- Anti return alarm
- Normally Open
- Normally Closed
- Barcode reader
- Remote console
- Remote control
- Single tandem
- Double tandem
- Voice alarm
- Power supply from the top
- Opening counter
- Security photocell
- Led light
- Polycarbonate arm
- Plexiglass arm with LED
- Customer Logo

SECURITY SYSTEMS

POWER FAILURE: In the event of a power failure, the battery you are free to move (UNI EN 1125). When the power supply return, if the arm has been moved from its "closed" position, it will automatically return to its position.

IMPACT: In case of accidental impact with people or things, the torque is less than 5 N-m with simultaneous stop immediate of the engine.

ANTI-PANIC: If the arm is powered and closed, it is possible force it open with a push ≈ 30 N-m (UNI EN 1125); the alarm is activated immediately and after a programmable interval the arm returns automatically.